


COMBI CHECKER - COMBINATION OF METAL DETECTOR AND CHECKWEIGHER

MD GX



CW GX

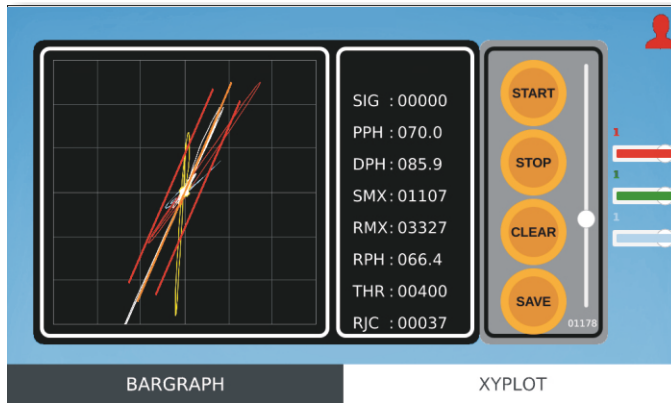

- A unique combination of Metal Detector and Checkweigher
- Custom Build Solution
- Dual Rejection - for Metal Detector and Checkweigher Optionally
- Cost Effective and Space Saving Solution

Metal Detector (SS & GX Model)

- Very High detection sensitivity
- Multilevel passwords (GX model)
- 4.5" HMI / 7" Touch Screen Display
- Intuitive graphical user interface
- Real time X-Y plot / Numerical + Graphical Display
- FDA 21 CFR Part 11 compliant (GX model)
- Ethernet connectivity for data transfer (GX model)
- Auto Product setting
- Finger print sensor (optional)
- Data can be stored up to 7 years (GX model)
- SCADA / IIoT connectivity (optional) (GX model)
- Live metal sample can be identified (GX model)

Check Weigher (Standard & GX model)

- 7" / 10" LCD touch screen
- Modern Graphical User Interface
- FDA 21 CFR Part 11 - compliant (GX model)
- Over 5 years of data storage (GX model)
- Informative dashboard (GX model)
- Multilevel user ID (GX model)
- Multi-weight classification
- Inbuilt report generation (GX model)
- Ethernet Connectivity
- 200 product memory (Standard model), 1000 product memory (GX model)



TECHNOFOUR ELECTRONICS PVT. LTD.

www.teplindia.com

Combi Checker offers variety of combination between Metal Detector with different aperture sizes and Checkweigher with different weight category to accommodate large variety of Industrial applications. This combination system is designed for simultaneously detecting metal contaminants and reducing giveaway in food/Pharma products. This solution significantly reduces required line space and optimizes user control.



Maximum Weighing capacity – 10 Kg

Weighing platform size –
500 X 440 mm (Belt width – 340mm)

Accuracy – + - 5gm

Least count – 1gm

Metal Detector coil size –
400mm(W) X 100-400mm (H)

Metal Detection sensitivity –
1mm Ferrous, 1.2mm Non Ferrous
and 1.5mm SS

Note - Metal Detector coil will be mounted on entry conveyor of Combi Checker

Model	Weight range	Weighing Platform size (In millimetre)		Weighing accuracy	Least count	Metal Detector coil size Bottle / Pouch	Metal Detector sensitivity
		Bottles (Length X Width)	Pouches (Length X Width)				
Combichecker CW1200	2gm to 1kg	250 X 200 (Belt width - 135)	350 X 250 (Belt width - 180)	+/-0.2g	0.1gm	200 - 250 X 50 - 300	0.8 - Ferrous, 1.2 Non Ferrous and 1.5 SS
Combichecker CW3000	4gm to 2kg	250 X 200 (Belt width - 135)	440 X 340 (Belt width - 240)	+/-0.4g	0.2gm	200 - 300 X 100 - 400	1.0 - Ferrous, 1.2 Non Ferrous and 1.5 SS
Combichecker CW6000	10gm to 5kg	350 X 250 (Belt width - 180)	550X380 (Belt Width - 280)	+/- 2g	0.5gm	250 - 350 X 100 - 400	1.0 - Ferrous, 1.2 Non Ferrous and 1.5 SS
Combichecker CW10K	20gm to 10kg	550 X 440 (Belt width - 340)		+/- 5gm	1gm	400 X 100 - 400	1.0 - Ferrous, 1.2 Non Ferrous and 1.5 SS
Combichecker 21K	40gm to 20kg	550 X 440(Belt width - 340) / 700 X500 (Belt width - 420)		+/- 10gm	2gm	400/500 X 100 - 400	1.0 - Ferrous, 1.2 Non Ferrous and 1.5 SS

Checkweigher accuracy depends on the product, weight, speed, Transport behaviour and Environmental condition. Metal Detection sensitivity may change depending on product and environment condition (the mentioned sensitivity is without compensating product effect).

GENERAL SPECIFICATION

- **Construction:** Stainless steel / Mild steel
- **Weighing Sensor:** Load Cell / Weigh Cell
- **Rejection Mechanism:** Air Blow / Pusher / Diverter
- **Other Attachment:** Various infeed mechanism like bottle separator, stabilizer, turn table etc. available
- **Power Requirement:** Single Phase 230 V AC / 50HZ / 400VA
- **Pneumatic Requirement:** 6Kgs / cm² for all rejection mechanisms

* Due to continuous development, specifications subject to change without notice.



TECHNOFOUR ELECTRONICS PVT. LTD.

Gat No.3(PT), 5(PT), 243(PT), Kasurdi (Kheba),
Khed Shivapur-Saswad Road, Post: Khed Shivapur,
Taluka: Bhore, District: Pune 412 205. Maharashtra, India.
Tel: 8888832057, 8888832194, + 91-2113-305200, 305246
Email: pcssales@tepl.co.in
Website: www.teplindia.com